

528, 013

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
30 June 2005 (30.06.2005)

PCT

(10) International Publication Number
WO 2005/059911 A1

- (51) International Patent Classification⁷: **G11B 19/12**, 19/28, 20/10
- (21) International Application Number:
PCT/JP2004/018542
- (22) International Filing Date: 7 December 2004 (07.12.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2003-417648 16 December 2003 (16.12.2003) JP
- (71) Applicant (for all designated States except US):
KABUSHIKI KAISHA TOSHIBA [JP/JP]; 1-1, Shibaura
1-chome, Minato-ku, Tokyo, 1058001 (JP).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **KUMAGAI, Akira**
[JP/JP].
- (74) Agents: **SUZUYE, Takehiko** et al.; c/o **SUZUYE & SUZUYE** 7-2, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo, 1000013 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ELECTRONIC DEVICE HAVING DRIVING DEVICE FOR ROTATING RECORDING MEDIUM, AND DRIVING METHOD FOR DRIVING DEVICE

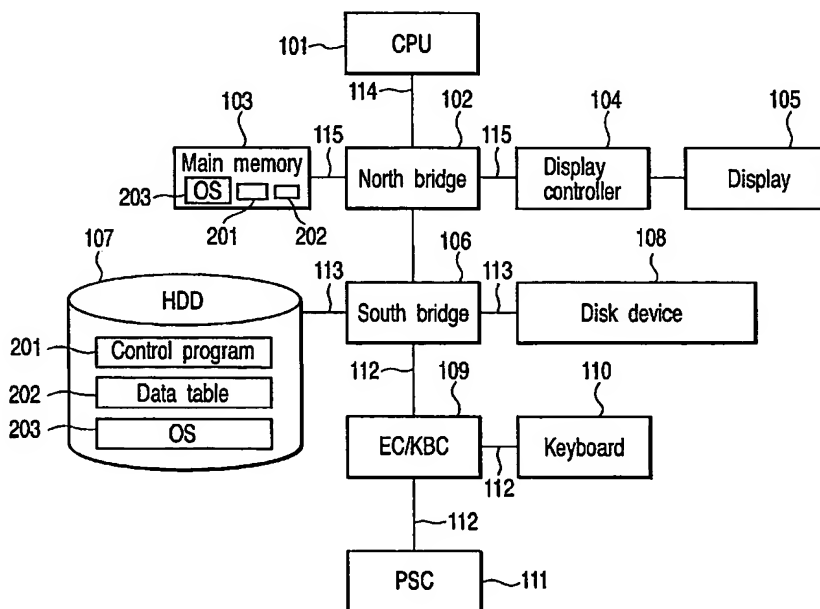

(57) Abstract: According to this invention, a CPU executes a control program to perform medium determination including the type of contents of a medium loaded in a disk device. The CPU controls the rotational speed of the disk device to one optimal for the loaded medium in accordance with the determined type of medium.

WO 2005/059911 A1

D E S C R I P T I O N

5 ELECTRONIC DEVICE HAVING DRIVING
DEVICE FOR ROTATING RECORDING MEDIUM,
AND DRIVING METHOD FOR DRIVING DEVICE

Technical Field

The present invention relates to an electronic
device having a driving device for rotating a recording
10 medium, and a driving method for the driving device.

Background Art

There has conventionally been proposed a disk
device capable of selecting a quick mode in which seek
and data read/write are performed at a high speed and
15 a silent mode in which seek and data read/write are
performed at a low speed with low power consumption
and little noise, as disclosed in, e.g., Jpn. Pat.
Appln. KOKAI Publication No. 2003-263849. However,
the conventional disk device is not always convenient
20 because it is not equipped with a mechanism which
controls the rotational speed of a driving device such
as a disk device in accordance with an arbitrary medium
(e.g., data CD, music CD, or DVD-ROM) used by the user.
Recently, the driving device processes many types
25 of rotating recording media and contents. In this
situation, demands have arisen for a driving device
capable of always driving a rotating recording medium
at an optimal driving speed in accordance with the type
of target rotating recording medium and the type of

contents recorded on the rotating recording medium.

Disclosure of Invention

The present invention has been made to overcome the conventional drawbacks, and has as its object
5 to provide an electronic device having a rotating recording medium driving device capable of always driving a rotating recording medium at an optimal driving speed in accordance with the type of target rotating recording medium and the type of contents
10 recorded on the rotating recording medium, a driving method for the driving device, and a program applied to a computer which accesses the rotating recording medium.

According to the present invention, an electronic device comprises a driving device which has
15 a loading mechanism for a rotating recording medium and can control a rotational speed of the rotating recording medium loaded in the loading mechanism, and control means for controlling the rotational speed of
20 the driving device on the basis of a determined type of information by determining a type of information recorded on the rotating recording medium.

Further, in the present invention, a driving method applied to a driving device which comprises
25 a loading mechanism for a rotating recording medium and rotates the rotating recording medium loaded in the loading mechanism comprises determining a type

of information recorded on the rotating recording medium, and controlling a rotational speed of the driving device on the basis of the determined type of information.

5 Also, in the present invention, a program causes a computer which accesses a rotating recording medium, to implement a function of accessing the rotating recording medium to determine a type of information recorded on the rotating recording medium,
10 and a function of controlling a rotational speed of the rotating recording medium on the basis of the determined type of information.

 In this way, the rotating recording medium can always be driven and controlled at an optimal
15 rotational speed in accordance with the type of target rotating recording medium and the type of contents recorded on the rotating recording medium.

 Additional objects and advantages of the invention will be set forth in the description which follows,
20 and in part will be obvious from the description, or may be learned by practice of the invention. The objects and advantages of the invention may be realized and obtained by means of the instrumentalities and combinations particularly pointed out hereinafter.

25 Brief Description of Drawings

 The accompanying drawings, which are incorporated in and constitute a part of the specification,

illustrate embodiments of the invention, and together with the general description given above and the detailed description of the embodiments given below, serve to explain the principles of the invention.

5 FIG. 1 is a block diagram showing an example of the arrangement of an electronic device according to an embodiment of the present invention;

 FIG. 2 is a table showing an example of the structure of a data table according to the embodiment
10 of the present invention;

 FIG. 3 is a flowchart showing an example of the process sequence of a control program for a driving device upon rotational speed setting according to the embodiment of the present invention;

15 FIG. 4 is a flowchart showing another example of the process sequence of the control program for the driving device upon user operation according to the embodiment of the present invention; and

 FIG. 5 is a table showing an example of the structure of a driving operation table according to
20 the embodiment of the present invention.

Best Mode for Carrying Out the Invention

A preferred embodiment of the present invention will be described below with reference to the several
25 views of the accompanying drawing.

 FIG. 1 shows the arrangement of an electronic device according to the embodiment of the present

invention. The electronic device is, for example, a personal computer, and its building components are illustrated.

The computer according to the embodiment comprises
5 a CPU 101, a north bridge 102, a main memory 103, a display controller 104, a display 105, a south bridge 106, a hard disk drive (HDD) 107, a disk device 108 serving as a driving device capable of controlling the rotational speed of a disk, an embedded controller/
10 keyboard controller (EC/KBC) 109, a keyboard 110, and a power controller (PSC) 111.

As information associated with processes of the embodiment, the HDD 107 stores a control program 201 for controlling to optimally drive to rotate a disk
15 in accordance with the type of disk serving as a rotating recording medium loaded in the disk loading mechanism of the disk device 108 and the type of contents recorded on the disk, a data table 202 which is looked up by the control program 201 and makes the
20 type of contents and the rotational speed of the disk correspond to each other, and an operating system (OS) 203 for controlling the computer.

The CPU 101 is a processor adopted to control the operation of the computer. The CPU 101 executes the OS
25 203 and various application programs which are loaded from the HDD 107 to the main memory 103. The control program 201 stored in the HDD 107 is also loaded to the

main memory 103 together with the data table 202, and executed by the CPU 101. The process of the control program 201 in this case will be described later with reference to the flowchart shown in FIG. 3. The CPU
5 101 also executes a BIOS stored in a BIOS-ROM (not shown).

The north bridge 102 is a bridge device which connects a local bus 114 of the CPU 101 and, e.g., a PCI bus 115 in two ways. The north bridge 102
10 incorporates a memory controller (not shown) which controls access to the main memory 103, and an interface (not shown) for the display controller 104.

The display controller 104 controls the display 105 which adopts, e.g., an LCD and is used as the
15 display monitor of the computer.

The south bridge 106 is a bridge device which connects a PCI bus 113 and, e.g., an ISA bus 112 in two ways. The south bridge 106 controls devices on the PCI bus 113 and devices on the ISA bus 112. The disk
20 device 108 capable of controlling the rotational speed of the disk is also controlled by the south bridge 106. The ISA bus 112 is connected to the keyboard 110, PSC 111, and the like via the EC/KBC 109. The south bridge 106 also incorporates an IDE controller (not shown) for
25 controlling the HDD 107.

The HDD 107 stores the control program 201, and the data table 202 which is looked up by the control

program 201. The control program 201 and data table 202 are loaded to the main memory 103 upon activation of the system, and executed by the CPU 101.

5 The disk device 108 capable of controlling the rotational speed of the disk processes disks serving as rotating recording media which record various contents, such as a music CD, a data CD-R, and a DVD which records moving pictures. The disk device 108 comprises a disk loading mechanism. The disk device 108 drives and controls a disk at an optimal rotational speed under the control of the control program 201 in accordance with the type of disk loaded into the loading mechanism and the type of contents recorded on the disk. The disk device 108 accesses all or some of, 10 e.g., a CD-ROM, CD-R, CD-RW, DVD-ROM, DVD-R, DVD-RW, DVD+R, DVD+RW, and DVD-RAM, and executes a read/write process for recording and playing back various pieces of information. In the embodiment, when the disk is a music CD, the disk which records music data is driven 15 to rotate at a low speed of x4 under the control of the control program 201. When the disk is a data CD-R, the disk is driven to rotate at the highest speed (maximum speed) to realize high-speed data access.

25 The EC/KBC 109 is a 1-chip microcomputer in which an embedded controller for managing power in cooperation with the PSC 111 and a keyboard controller for controlling the keyboard 110 are integrated.

FIG. 2 shows an example of the structure of the data table 202 which is looked up by the control program 201. The data table 202 shown in FIG. 2 defines the rotational speed of the disk for each type of medium and each type of contents in a medium type determination process. The table may define the rotational speed of the disk for each type of contents. The data table 202 is stored in the HDD 107 together with the control program 201. When the control program 201 is loaded to the main memory 103 and executed by the CPU 101, the data table 202 is loaded to the main memory 103 under the control of the control program 201, and used for rotational speed control of the control program 201.

FIG. 3 shows the process sequence of the control program 201 which is loaded from the HDD 107 to the main memory 103 and executed by the CPU 101.

The process shown in FIG. 3 is executed upon system activation of the OS 203 or upon return from a standby state or idle state. Upon activation of the OS 203, the control program 201 stored in the HDD 107 is loaded to the main memory 103 and executed by the CPU 101.

In the process of the control program 201, the data table 202 stored in the hard disk of the HDD 107 is loaded to the main memory 103 (step S11). The data table 202 defines the rotational speed of the disk for

each type of medium and can be changed. The rotational speed of the disk is defined for each medium such that the rotational speed is x4 for a music CD and the highest speed for a data CD-R.

5 After the data table 202 is loaded to the main memory 103, whether a disk (medium) has been set in the disk device 108 is determined (step S12).

 If no disk (medium) exists (has not been loaded) (NO in step S12), the flow waits for a message from the
10 OS 203 (step S13).

 If a message is received from the OS 203 (YES in step S13), whether the message is a notification that the disk (medium) has been inserted into the disk device 108 is determined (step S15).

15 If the message is not a notification that the disk (medium) has been inserted (NO in step S15), whether the message is a notification of return from the standby or idle state is determined (step S16). If the message is not a return notification (NO in step
20 S16), whether the message is a program end notification is determined (step S17).

 If the message is a program end notification (YES in step S17), the program end process is performed. If the message is not an end notification (NO in step
25 S17), the flow waits for the next message from the OS 203 without any process (step S13).

 If the disk (medium) is determined in step S12

to have been set (YES in step S12), data of the medium is loaded to determine the type of medium and the type of contents. If determination is successful (YES in step S21), the disk rotational speed of the disk device 108 is determined by looking up the data table 202 in the main memory 103 in accordance with the type (information type) specified by the determination result (step S22). A rotational speed setting instruction based on the determination is issued to the disk device 108 (step S23). The rotational speed setting instruction to the disk device 108 generally uses an ASPI (Advanced SCSI Programming Interface) SET CD SPEED command.

If the message is in step S15 a notification that the disk (medium) has been inserted (YES in step S15), processes in step S21 and subsequent steps are done.

If the message is in step S16 a notification of return from the standby or idle state (YES in step S16), processes in step S21 and subsequent steps are done.

If the medium cannot be determined in step S21 owing to a failure in loading data of the medium (NO in step S21), no medium is determined to exist, and the flow shifts to step S13 and waits for the next message from the OS 203.

In this manner, the disk (medium) rotational speed of the disk device 108 is controlled to a rotational

speed optimal for the medium in accordance with determination of the type of medium containing the type of contents of the medium loaded in the disk device 108. A music CD, DVD-Video, and the like can be enjoyed in a
5 silent mode while rotational noise of the disk device 108 is suppressed small. Also, data can be read/written from/in a data CD and the like in a high-speed access mode.

Process operation of the control program 201 when
10 the OS 203 issues an instruction upon various user operations to the disk device 108 while the disk device 108 accesses a medium at a rotational speed complying with the rotational speed setting instruction will be explained with reference to FIG. 4. FIG. 4 shows the
15 process sequence of disk rotation control in accordance with a disk driving operation instruction executed by the control program 201. FIG. 5 shows an example of the structure of a driving operation table 402 which is looked up by this process. Although not shown in
20 FIG. 1, the driving operation table 402 is stored in the HDD 107 and loaded to the main memory 103 by the control program 201, similar to the data table 202.

If a disk device operation instruction is issued by user operation while the disk device 108 accesses
25 a medium at a rotational speed complying with the rotational speed setting instruction issued in step S23 (YES in step S31), whether the instruction is one to

end the operation of the disk device is determined (step S32). If the instruction is one to end the operation of the disk device (YES in step S32), the disk device 108 is instructed to end the operation, and the control program 201 ends.

If the disk device operation instruction is an instruction of another operation such as picture search or playback (NO in step S32), the rotational speed of the disk in executing the operation instruction is acquired by looking up the driving operation table 402 shown in FIG. 5 (step S33).

The acquired disk rotational speed and a disk rotational speed complying with the currently executed rotational speed setting instruction are compared (step S34). If these rotational speeds coincide with each other (YES in step S35), the flow returns to the process in step S31 while continuing driving control based on the disk rotational speed complying with the currently executed rotational speed setting instruction. If these rotational speeds do not coincide with each other (NO in step S35), a rotational speed setting instruction (SET CD SPEED command) is so issued as to set a disk rotational speed complying with the operation instruction (step S36).

In the above-described embodiment, the rotational speed of a medium loaded in the disk device 108 is selected by looking up the data table 202 or driving

operation table 402. A rotational speed instruction can also be issued using the internal parameters of the control program 201 without preparing the data table 202 and driving operation table 402.

5 Additional advantages and modifications will readily occur to those skilled in the art. Therefore, the invention in its broader aspects is not limited to the specific details and representative embodiments shown and described herein. Accordingly, various
10 modifications may be made without departing from the spirit or scope of the general inventive concept as defined by the appended claims and their equivalents.

C L A I M S

1. An electronic device comprising:

a driving device which comprises a loading
mechanism for a rotating recording medium and can
5 control a rotational speed of the rotating recording
medium loaded in the loading mechanism; and

a control device which controls the rotational
speed of the driving device on the basis of a deter-
mined type of information by determining a type of
10 information recorded on the rotating recording medium.

2. A device according to claim 1, wherein the
control device determines the type of information
recorded on the rotating recording medium upon initial
operation, upon return from a standby state, or upon
15 return from an idle state, and controls the rotational
speed of the driving device on the basis of the
determined type of information.

3. A device according to claim 2, wherein the
control device determines, from a content of the
20 information recorded on the rotating recording medium,
whether the type of information is information
accompanied by playback of an audible sound, and when
the type of information is determined to be information
accompanied by playback of an audible sound, drives to
25 rotate the driving device at a predetermined low speed.

4. A device according to claim 2, wherein the
control device determines, from a content of the

information recorded on the rotating recording medium,
whether the type of information is information accompa-
nied by transfer of a large amount of data, and when
the type of information is determined to be information
5 accompanied by transfer of a large amount of data,
drives to rotate the driving device at a predetermined
highest speed.

5. A device according to claim 2, wherein the
control device comprises a table which makes the
10 type of recorded information for a rotating recording
medium loadable in the loading mechanism of the driving
device and the rotational speed of the driving device
correspond to each other, and controls the rotational
speed of the driving device in accordance with the
15 determined type of information by looking up the table.

6. A device according to claim 2, wherein the
control device determines, prior to determination of
the type of information, whether the rotating recording
medium has been loaded in the loading mechanism of the
20 driving device, and when the rotating recording medium
is determined to have been loaded, loads data from the
rotating recording medium and determines the type of
information from a content of the data.

7. A device according to claim 6, wherein the
25 control device further comprises a table which makes
the rotational speed of the driving device and a type
of information recorded on the rotating recording

medium loadable in the loading mechanism of the driving device correspond to each other, and the control device determines the rotational speed of the driving device in accordance with the determined type of information by looking up the table and controls the rotational speed of the driving device in accordance with the determined rotational speed.

8. A driving method applied to a driving device which comprises a loading mechanism for a rotating recording medium and rotates the rotating recording medium loaded in the loading mechanism, comprising:

determining a type of information recorded on the rotating recording medium; and
determining a rotational speed of the driving device on the basis of the determined type of information.

9. A method according to claim 8, wherein the type of information is determined upon initial operation of the driving device, upon return from a standby state, or upon return from an idle state.

10. A method according to claim 9, wherein in determining the type of information, whether the type of information is information accompanied by playback of an audible sound is determined from a content of the information recorded on the rotating recording medium, and

in determining the rotational speed, when the

type of information is determined to be information accompanied by playback of an audible sound, the rotational speed of the driving device is determined to a predetermined low speed.

5 11. A method according to claim 9, wherein
in determining the type of information, whether the type of information is information accompanied by transfer of a large amount of data is determined from a content of the information recorded on the rotating
10 recording medium, and

in determining the rotational speed, when the type of information is determined to be information accompanied by transfer of a large amount of data, the rotational speed of the driving device is determined
15 to a predetermined highest speed.

12. A method according to claim 9, wherein in determining the rotational speed, the rotational speed of the driving device is determined in accordance with the determined type of information by looking up a
20 predetermined table which makes the type of recorded information for a rotating recording medium loadable in the loading mechanism of the driving device and the rotational speed of the driving device correspond to each other.

25 13. A method according to claim 9, which further comprises determining, prior to determination of the type of information, whether the rotating recording

medium has been loaded in the loading mechanism of the driving device, and in which in determining the type of information, when the rotating recording medium is determined to have been loaded, data is loaded from the rotating recording medium to determine from a content of the data the type of information recorded on the rotating recording medium.

14. A method according to claim 13, wherein in controlling the rotational speed, the rotational speed of the driving device is determined from the determined type of information by looking up a predetermined table which makes the rotational speed of the driving device and a type of information recorded on the rotating recording medium loadable in the loading mechanism of the driving device correspond to each other.

1 / 5

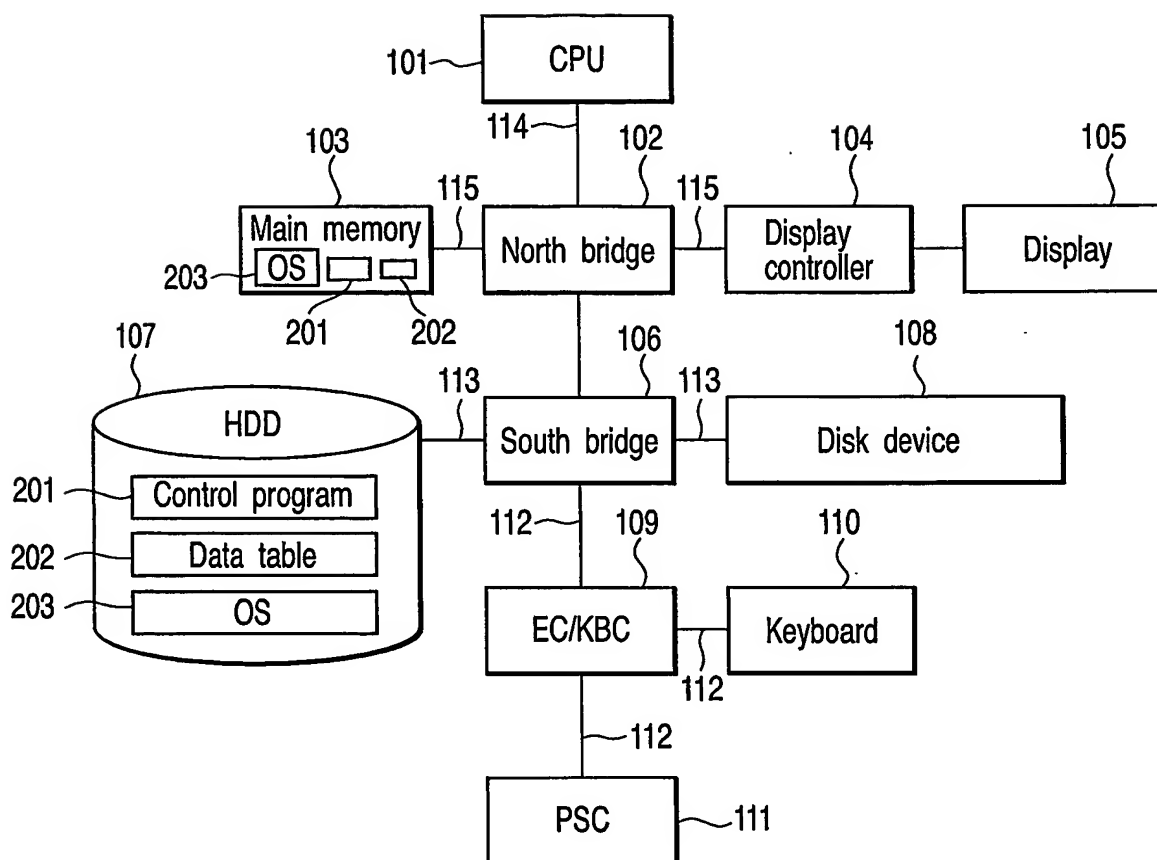


FIG. 1

202

Medium type (medium / contents)	Disk rotational speed
Type A (medium=a, contents=a)	x4
Type B (medium=a, contents=b)	x4
Type C (medium=a, contents=c)	Highest
Type D (medium=b, contents=b)	x8
Type E (medium=b, contents=c)	x8

FIG. 2

3 / 5

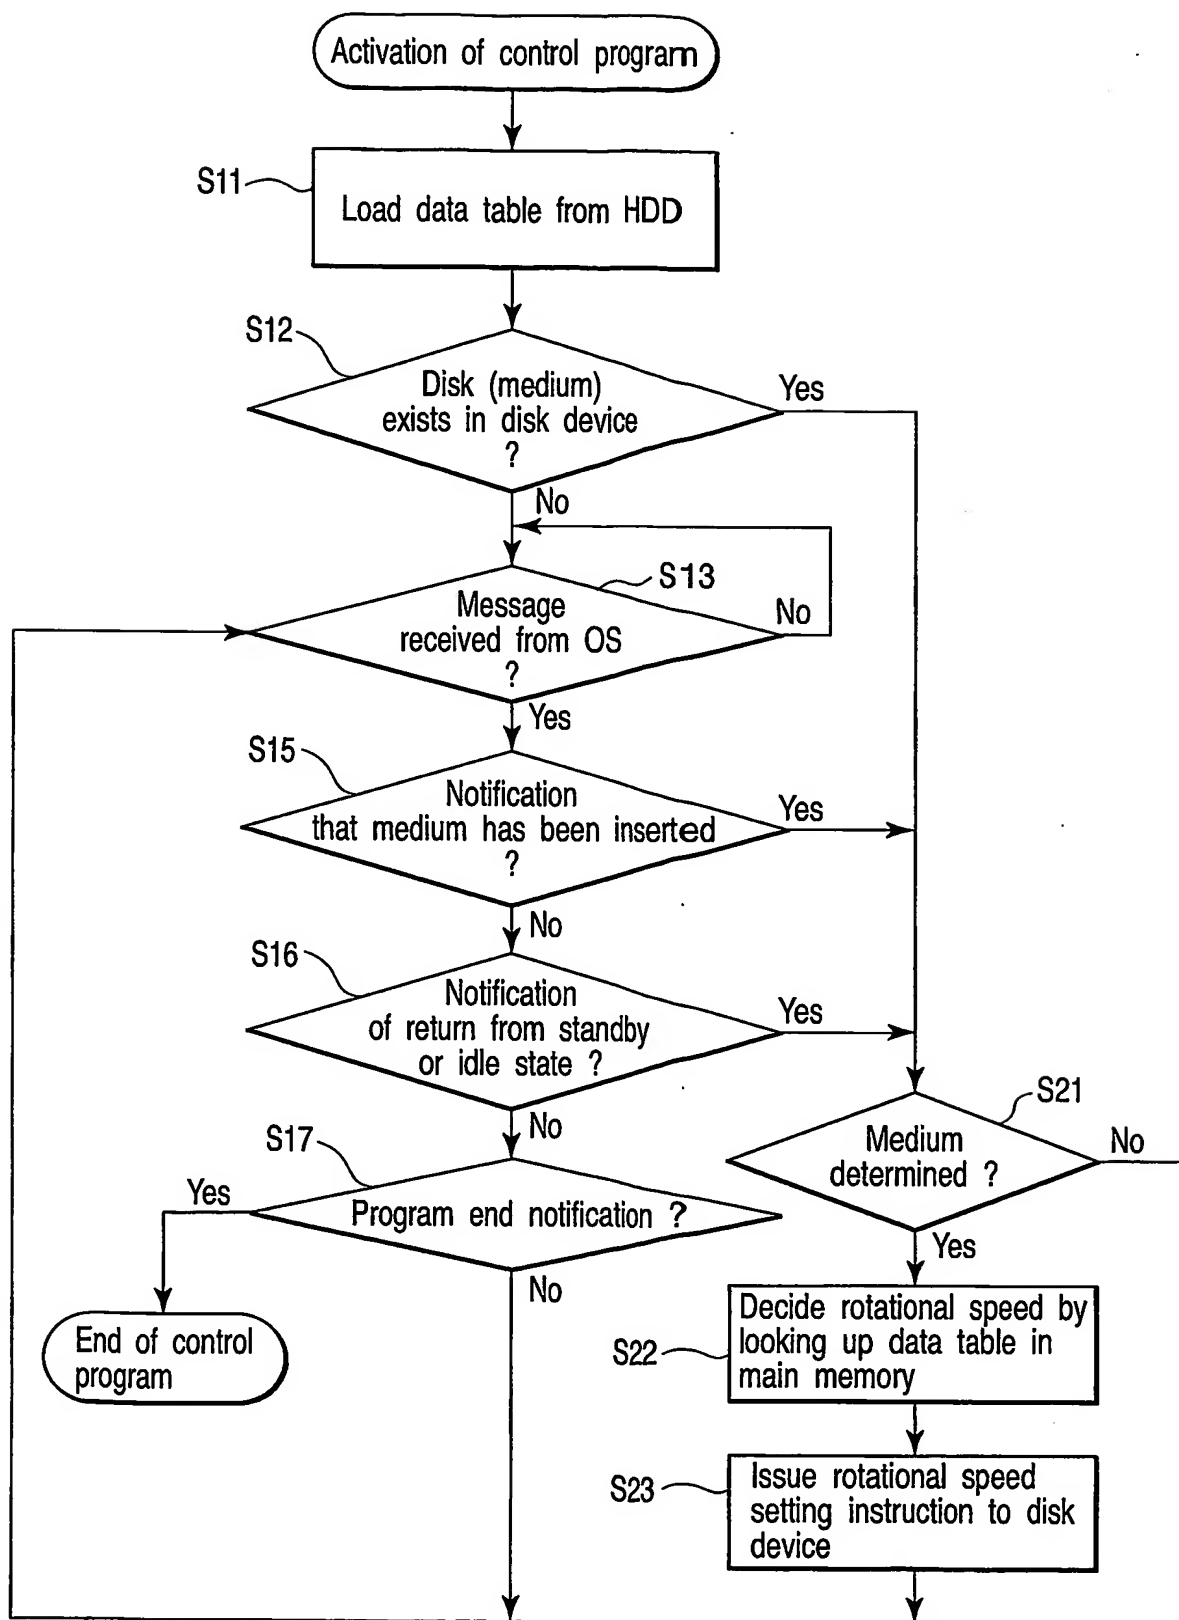


FIG. 3

4/5

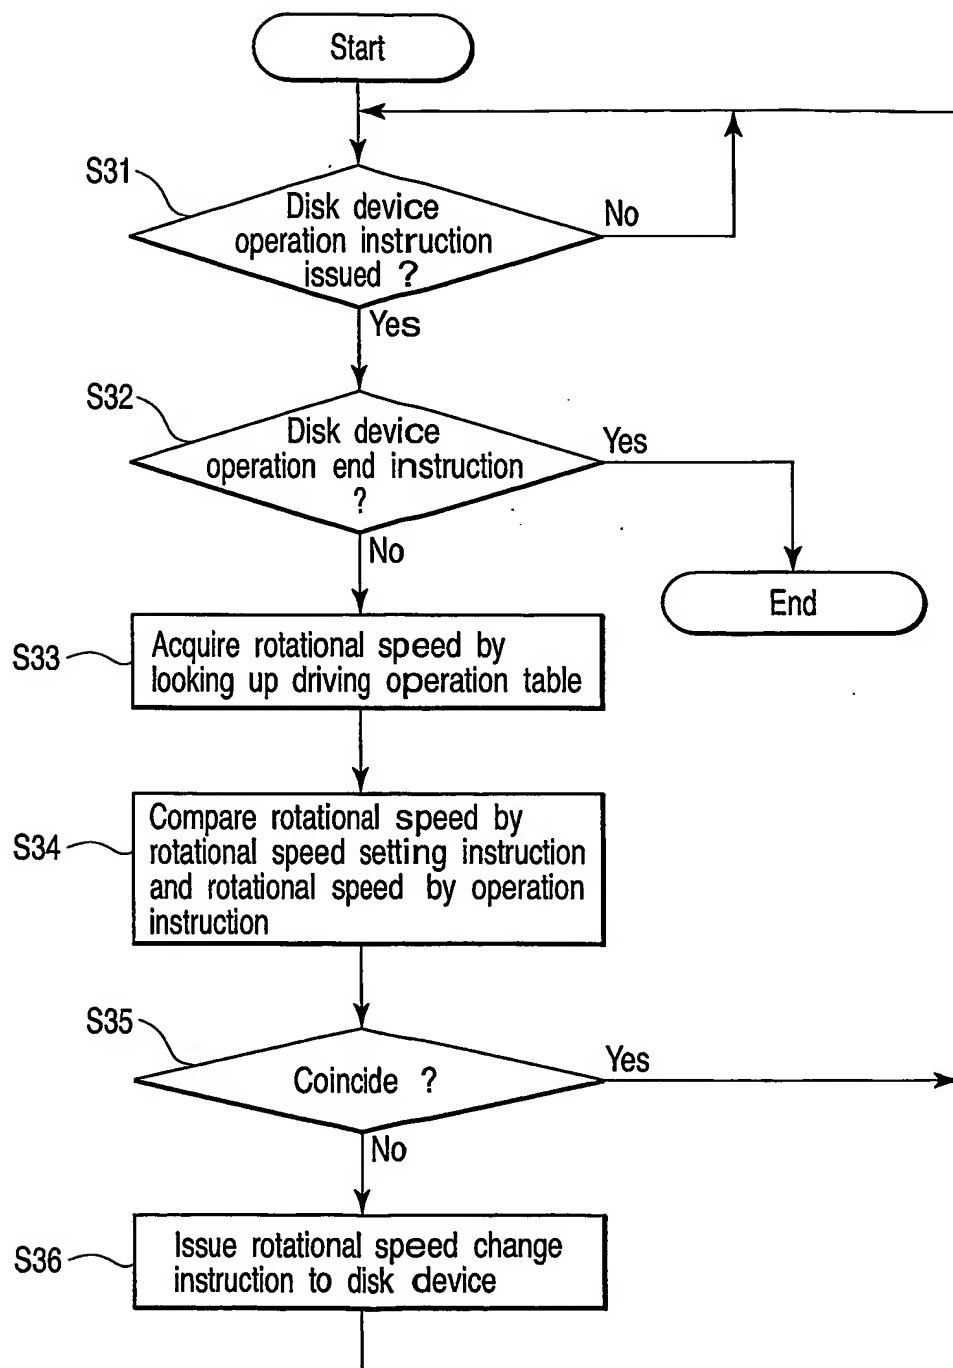


FIG. 4

402

Driving operation instruction	Medium type (medium / contents)	Disk rotational speed
COM-A	Type A (medium=a, contents=a)	x4
COM-A	Type B (medium=a, contents=b)	x4
COM-B	Type C (medium=a, contents=c)	Highest
COM-B	Type D (medium=b, contents=b)	x8
COM-C	Type E (medium=b, contents=c)	x8

FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP2004/018542

A. CLASSIFICATION OF SUBJECT MATTER

Int.Cl⁷ G11B19/12, 19/28, 20/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int.Cl⁷ G11B19/12, 19/28, 20/10

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Japanese Utility Model Gazette 1922-1996, Japanese Publication of Unexamined Utility Model Applications 1971-2005, Japanese Registered Utility Model Gazette 1994-2005, Japanese Gazette Containing the Utility Model 1996-2005

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2002-367276 A (Ricoh K.K.) 2002.12.30 Whole document, Fig. 1-6	1, 8
Y	Whole document, Fig. 1-6 (Family: none)	2-7, 9-14
X	JP 2001-357601 A (Hitachi Ltd.) 2001.12.26 Whole document, Fig. 1-2	1, 8
Y	Whole document, Fig. 1-2 (Family: none)	2-7, 9-14
X	JP 7-93954 A (Matsushita Electric Ind. Co. Ltd.) 1995.04.07 Whole document, Fig. 1-2	1-4, 8-11
Y	Whole document, Fig. 1-2 (Family: none)	5-7, 12-14

☒ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

07.03.2005

Date of mailing of the international search report

29.3.2005

Name and mailing address of the ISA/JP

Japan Patent Office

3-4-3, Kasumigaseki, Chiyoda-ku, Tokyo 100-8915, Japan

Authorized officer

SHINICHI INOUE

Telephone No. +81-3-3581-1101 Ext. 3590

5Q

9058

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 4-291056 A (Matsushita Electric Ind. Co. Ltd.) 1992.10.15 Whole document, Fig.1-2	1,8
Y	Whole document, Fig.1-2 (Family:none)	2-7,9-14
Y	JP 2000-113573 A (Sanyo Electric Co.) 2000.04.21 Lines 9-19, column 1, Fig.2 (Family:none)	5,7,12,14